


FRONT ELEVATION

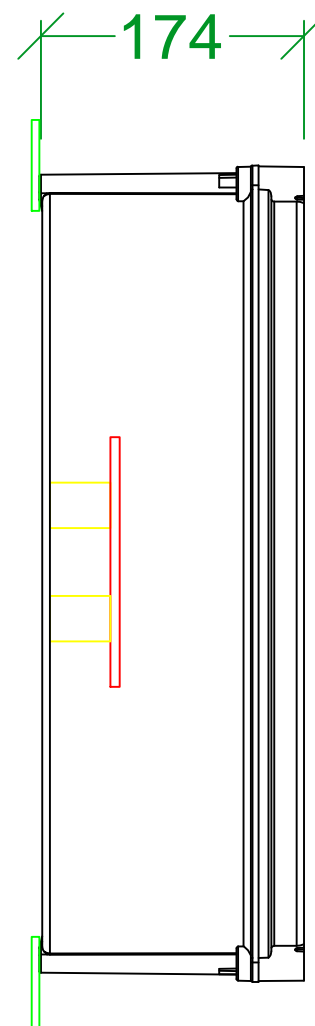

SIDE ELEVATION

CONSTRUCTION SPECIFICATION

IP42 200A INSULATED LONG LINK BOX:  
INSULATED ENCLOSURES. WALL MOUNT. LIFT OFF LIDS. CLEAR  
COVERS, W360mm x H540mm X D174mm

COPPER LINKS:

4 x W25mm x H165mm H6.3mm (RATED AT 392A) Cu WITH  
4 x M8 BOLTS. LINKS MOUNTED ON BUSBAR SUPPORT AT  
75mm CENTRES.

QTY 8, BUSBAR INSULATORS PART NO. SM-35


LABEL DETAILS:

1 x ELECTRICAL HAZARD LABEL  
1 x AS3439.1 LABEL

CONTRACTOR TO TAKE NOTE OF THE MIN & MAX DISTANCES  
WHEN INSTALLING, AS PER THE NSW SERVICE AND  
INSTALLATION RULES AND SUPPLY AUTHORITY REQUIREMENTS.

RISING MAIN CONNECTORS NOT SHOWN. RISING MAIN  
CONNECTORS ARE SUPPLIED UNINSULATED. BOVARA  
RECOMMENDS INSULATING RISING MAIN CONNECTORS AS PER  
AS3000.

COMPLIES TO AS3000, NSW SERVICE AND INSTALLATION  
RULES, AND AS3439.1

|   |  |                          |  |                  |
|---|--|--------------------------|--|------------------|
| PROJECT -   | CUSTOMER -   | DRAWN by - DYLAN DONG    | YOUR REF:                                | IP Rating : IP42 |
|   |  |                          | COLOUR : GREY ENCLOSURES WITH CLEAR LIDS | FORM: FORM 1     |
| DRAWING No. - LINK-200IL  | DATE - 01/06/2015  | CHECKED by - NAS CHEDIAC | MATERIAL : 3mm POLYCARBONATE             | WIDTH: 360mm     |
|  | 102 WETHERILL ST NORTH<br>SILVERWATER, NSW 2128<br>PH: 1300 268 272<br>Fax: 1300 272 862<br>Email: sales@bovara.com.au |                          | SCALE : 1:5 @ A3                         | HEIGHT: 540mm    |
|   |  |                          |  | DEPTH: 174mm     |