


FRONT ELEVATION

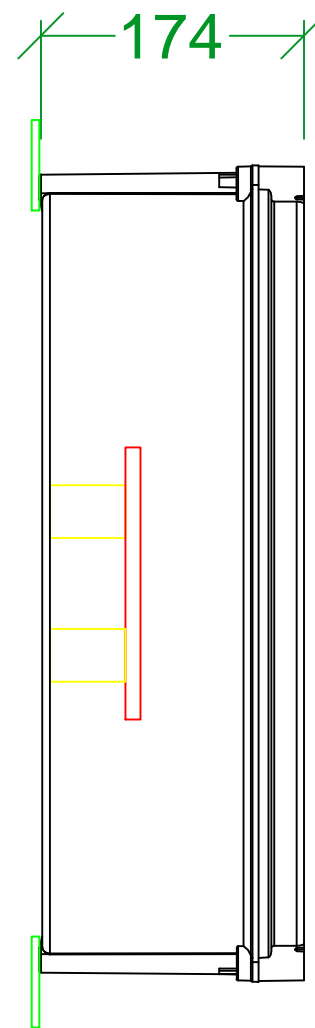

SIDE ELEVATION

CONSTRUCTION SPECIFICATION

IP42 400A INSULATED LONG LINK BOX:
INSULATED ENCLOSURES. WALL MOUNT. LIFT OFF LIDS. CLEAR
COVERS, W360mm x H540mm X D174mm

COPPER LINKS:

4 x W30mm x L180mm x D10mm (RATED AT 687A) Cu WITH 4 x
M10 BOLTS. LINKS MOUNTED ON BUSBAR SUPPORT AT 75mm
CENTRES.

QTY 8, BUSBAR INSULATORS PART NO. SM-51


LABEL DETAILS:

1 x ELECTRICAL HAZARD LABEL
1 x AS3439.1 LABEL

CONTRACTOR TO TAKE NOTE OF THE MIN & MAX DISTANCES WHEN
INSTALLING, AS PER THE NSW SERVICE AND INSTALLATION RULES
AND SUPPLY AUTHORITY REQUIREMENTS.

RISING MAIN CONNECTORS NOT SHOWN. RISING MAIN CONNECTORS
ARE SUPPLIED UNINSULATED. BOVARA RECOMMENDS INSULATING
RISING MAIN CONNECTERS AS PER AS3000.

COMPLIES TO AS3000, NSW SERVICE AND INSTALLATION RULES, AND
AS3439.1

PROJECT -	CUSTOMER -	DRAWN by - DYLAN DONG	YOUR REF:	IP Rating : IP42
			COLOUR : GREY ENCLOSURES WITH CLEAR LIDS	FORM: FORM 1
DRAWING No. - LINK-400IL	DATE - 01/06/2015	CHECKED by - NAS CHEDIAC	MATERIAL : 3mm POLYCARBONATE	WIDTH: 360mm
	102 WETHERILL ST NORTH SILVERWATER, NSW 2128 PH: 1300 268 272 Fax: 1300 272 862 Email: sales@bovara.com.au		SCALE : 1:5 @ A3	HEIGHT: 540mm
				DEPTH: 174mm