


FRONT ELEVATION

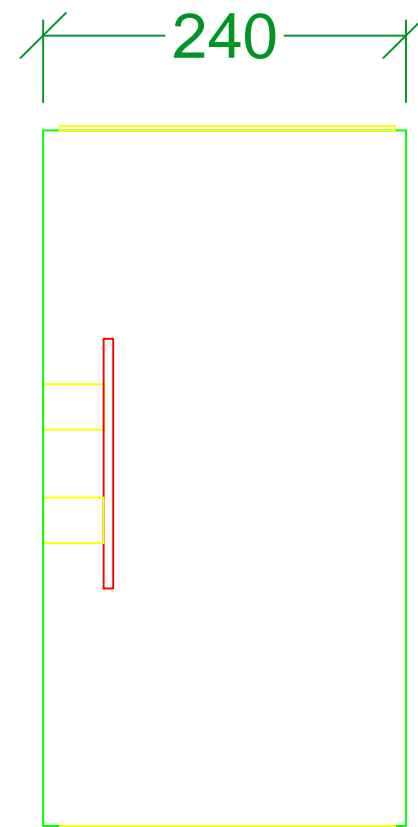

SIDE ELEVATION

CONSTRUCTION SPECIFICATION

IP30 200A METAL LINK BOX:  
 1.5MM, ZINC ANNEALED STEEL, POWDER COATED COLOUR:  
 ORANGE-X15 SMOOTH FINISH LIFT-OFF COVERS  
 SEALABLE W360mm x H460mm x D240mm

6mm BAKELITE GLAND PLATES TOP & BOTTOM.

COPPER LINKS:  
 4 x W25mm x H165mm H6.3mm (RATED AT 392A) Cu WITH  
 4 x M8 BOLTS. LINKS MOUNTED ON BUSBAR SUPPORT AT  
 75mm CENTRES.


QTY 8, BUSBAR INSULATORS PART NO. SM-35

LABEL DETAILS:  
 1 x ELECTRICAL HAZARD LABEL  
 1 x AS3439.1 LABEL

CONTRACTOR TO TAKE NOTE OF THE MIN & MAX DISTANCES  
 WHEN INSTALLING, AS PER THE NSW SERVICE AND  
 INSTALLATION RULES AND SUPPLY AUTHORITY REQUIREMENTS.

RISING MAIN CONNECTORS NOT SHOWN. RISING MAIN  
 CONNECTORS ARE SUPPLIED UNINSULATED. BOVARA  
 RECOMMENDS INSULATING RISING MAIN CONNECTERS AS PER  
 AS3000.

COMPLIES TO AS3000, NSW SERVICE AND INSTALLATION  
 RULES, AND AS3439.1

PROJECT -	CUSTOMER -	DRAWN by - DYLAN DONG	YOUR REF:	IP Rating : IP30
			COLOUR : X-15 ORANGE	FORM: FORM 1
DRAWING No. - LINK-200M	DATE - 01/06/2015	CHECKED by - NAS CHEDIAC	MATERIAL : 1.5mm GALVABOND STEEL	WIDTH: 360mm
	102 WETHERILL ST NORTH SILVERWATER, NSW 2128 PH: 1300 268 272 Fax: 1300 272 862 Email: sales@bovara.com.au		SCALE : 1:5 @ A3	HEIGHT: 460mm
				DEPTH: 220mm