

CONSTRUCTION SPECIFICATION

IP30 400A METAL LINK BOX:
 1.5MM, ZINC ANNEALED STEEL, POWDER COATED COLOUR:
 ORANGE-X15 SMOOTH FINISH LIFT-OFF COVERS
 SEALABLE W360mm x H460mm x D240mm

6mm BAKELITE GLAND PLATES TOP & BOTTOM.

COPPER LINKS:
 4 x W30mm x L180mm x D10mm (RATED AT 687A) Cu
 WITH 4 x M10 BOLTS. LINKS MOUNTED ON BUSBAR SUPPORT
 AT 75mm CENTRES.


QTY 8, BUSBAR INSULATORS PART NO. SM-51

LABEL DETAILS:
 1 x ELECTRICAL HAZARD LABEL
 1 x AS3439.1 LABEL


CONTRACTOR TO TAKE NOTE OF THE MIN & MAX DISTANCES
 WHEN INSTALLING, AS PER THE NSW SERVICE AND
 INSTALLATION RULES AND SUPPLY AUTHORITY REQUIREMENTS.

RISING MAIN CONNECTORS NOT SHOWN. RISING MAIN
 CONNECTORS ARE SUPPLIED UNINSULATED. BOVARA
 RECOMMENDS INSULATING RISING MAIN CONNECTERS AS PER
 AS3000.


COMPLIES TO AS3000, NSW SERVICE AND INSTALLATION
 RULES, AND AS3439.1

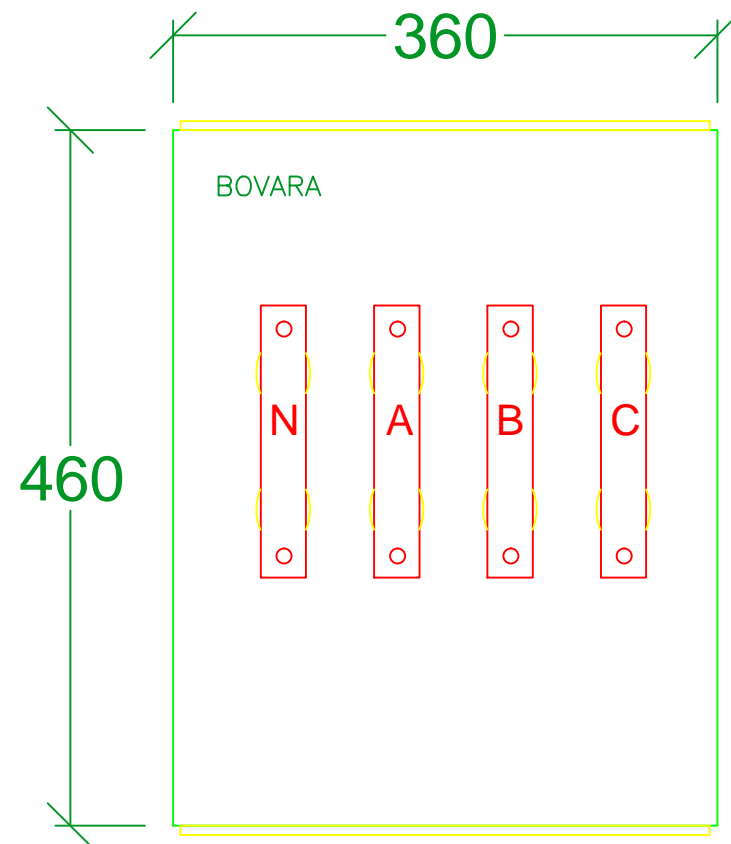

FRONT ELEVATION

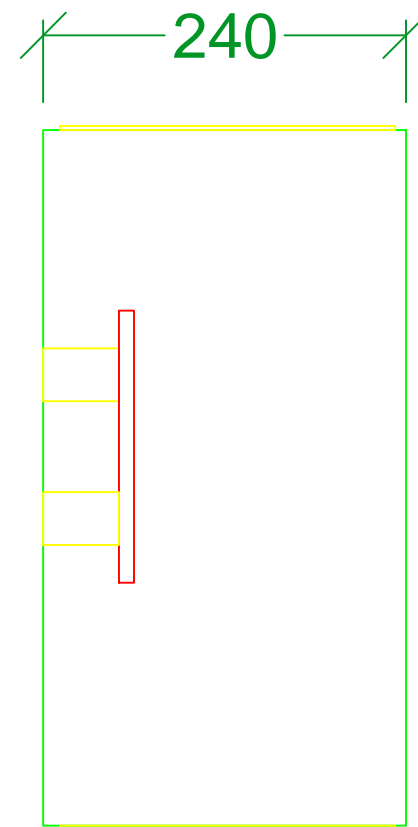

SIDE ELEVATION

PROJECT -	CUSTOMER -	DRAWN by - DYLAN DONG	YOUR REF:	IP Rating : IP30
			COLOUR : X-15 ORANGE	FORM: FORM 1
DRAWING No. - LINK-400M	DATE - 01/06/2015	CHECKED by - NAS CHEDIAC	MATERIAL : 1.5mm GALVABOND STEEL	WIDTH: 360mm
 BOVARA pty Ltd ELECTRICAL EQUIPMENT	102 WETHERILL ST NORTH SILVERWATER, NSW 2128 PH: 1300 268 272 Fax: 1300 272 862 Email: sales@bovara.com.au		SCALE : 1:5 @ A3	HEIGHT: 460mm
				DEPTH: 240mm