



FRONT ELEVATION (LID ON)

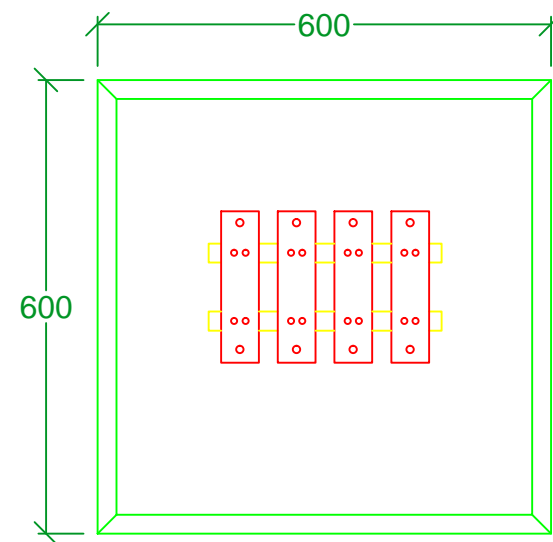

FRONT ELEVATION

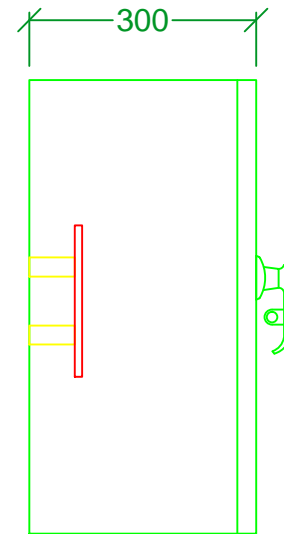

SIDE ELEVATION

CONSTRUCTION SPECIFICATION

IP65 630A METAL LINK BOX, WEATHER PROOF:
 1.5MM, MILD STEEL, POWDER COATED COLOUR: PEBBLE GREY RAL7032
 HINGED COVER W600mm x H600mm x D300mm
 PADLOCKABLE

6mm BAKELITE GLAND PLATES TOP & BOTTOM.

COPPER LINKS:

4 x W40mm x H200mm x D10mm CU LINKS (RATED AT 858A)
 MOUNTED ON BUSBAR SUPPORT CONSTRUCTED FROM DENSIFIED
 WOOD, AT 75MM CENTRES.


LABEL DETAILS:

1 x ELECTRICAL HAZARD LABEL
 1 x AS3439.1 LABEL

CONTRACTOR TO TAKE NOTE OF THE MIN & MAX DISTANCES WHEN
 INSTALLING, AS PER THE NSW SERVICE AND INSTALLATION RULES AND
 SUPPLY AUTHORITY REQUIREMENTS.

RISING MAIN CONNECTORS NOT SHOWN. RISING MAIN CONNECTORS
 ARE SUPPLIED UNINSULATED. BOVARA RECOMMENDS INSULATING RISING
 MAIN CONNECTORS AS PER AS3000.

COMPLIES TO AS3000, NSW SERVICE AND INSTALLATION RULES, AND
 AS3439.1

PROJECT -	CUSTOMER -	DRAWN by - DYLAN DONG	YOUR REF:	IP Rating : IP65
			COLOUR : RAL7032 PEBBLE GREY	FORM: FORM 1
DRAWING No. - LINK-630WPE	DATE - 01/06/2015	CHECKED by - NAS CHEDIAC	MATERIAL : 1.5mm GALVABOND STEEL	WIDTH: 600mm
	102 WETHERILL ST NORTH SILVERWATER, NSW 2128 PH: 1300 268 272 Fax: 1300 272 862 Email: sales@bovara.com.au		SCALE : 1:10 @ A3	HEIGHT: 600mm
				DEPTH: 350mm (INCLUDE PADLOCK HANDLE)