

CONSTRUCTION SPECIFICATION

IP65 800A METAL LINK BOX, WEATHER PROOF:  
 1.5MM, MILD STEEL, POWDER COATED COLOUR: PEBBLE GREY RAL7032  
 HINGED COVER W600mm x H600mm x D300mm  
 PADLOCKABLE

6mm BAKELITE GLAND PLATES TOP & BOTTOM.


COPPER LINKS:  
 4 x W50mm x H200mm x D10mm CU LINKS (RATED AT 858A) MOUNTED ON  
 BUSBAR SUPPORT CONSTRUCTED FROM DENSIFIED WOOD, AT 75MM CENTRES.

LABEL DETAILS:  
 1 x ELECTRICAL HAZARD LABEL  
 1 x AS3439.1 LABEL


CONTRACTOR TO TAKE NOTE OF THE MIN & MAX DISTANCES WHEN INSTALLING,  
 AS PER THE NSW SERVICE AND INSTALLATION RULES AND SUPPLY AUTHORITY  
 REQUIREMENTS.

RISING MAIN CONNECTORS NOT SHOWN. RISING MAIN CONNECTORS ARE  
 SUPPLIED UNINSULATED. BOVARA RECOMMENDS INSULATING RISING MAIN  
 CONNECTERS AS PER AS3000.


COMPLIES TO AS3000, NSW SERVICE AND INSTALLATION RULES, AND AS3439.1

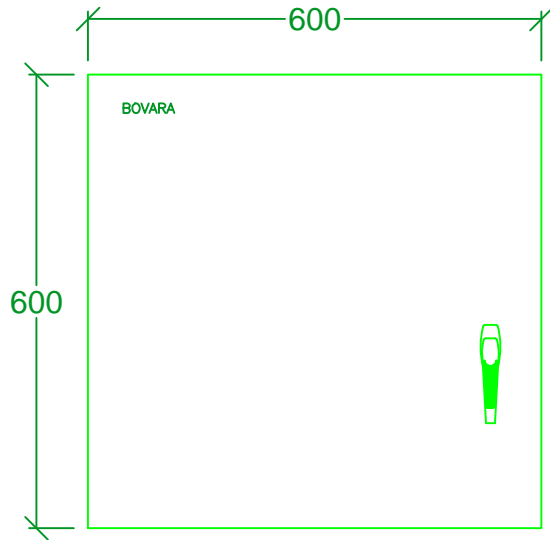


FRONT ELEVATION (LID ON)

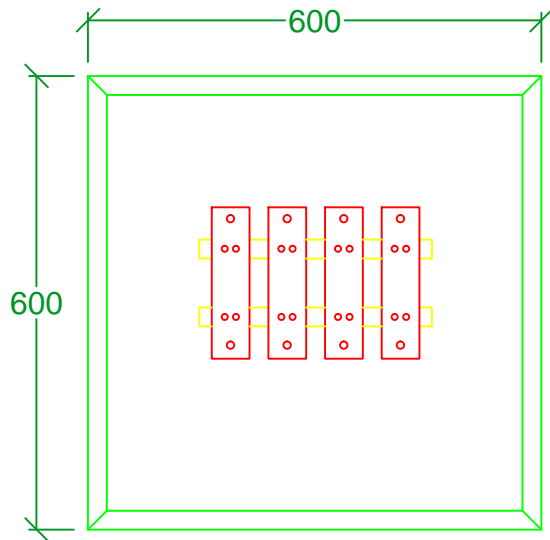

FRONT ELEVATION

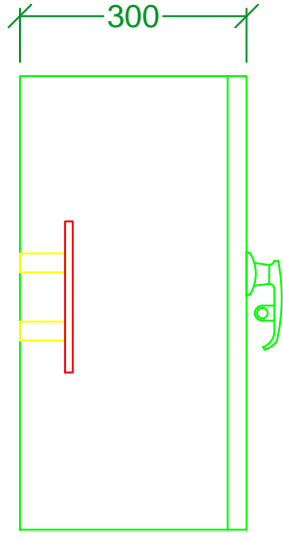

SIDE ELEVATION

PROJECT -	CUSTOMER -	DRAWN by - DYLAN DONG	YOUR REF:	IP Rating : IP65
			COLOUR : RAL7032 PEBBLE GREY	FORM: FORM 1
DRAWING No. - LINK-800WPE	DATE - 01/06/2015	CHECKED by - NAS CHEDIAC	MATERIAL : 1.5mm GALVABOND STEEL	WIDTH: 600mm
	102 WETHERILL ST NORTH SILVERWATER, NSW 2128 PH: 1300 268 272 Fax: 1300 272 862 Email: sales@bovara.com.au		SCALE : 1:10 @ A3	HEIGHT: 600mm
				DEPTH: 350mm (INCLUDE PADLOCK HANDLE)