



TOP/BOTTOM VIEW
(ALL)


FRONT VIEW
ESCUTCHEON
CUT-OUT

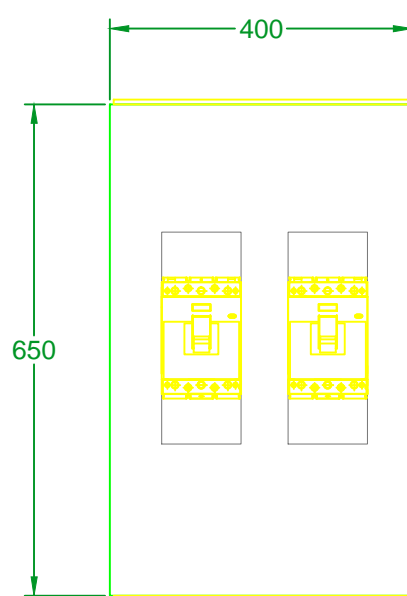

FRONT VIEW
(TOBLNT.00/160)

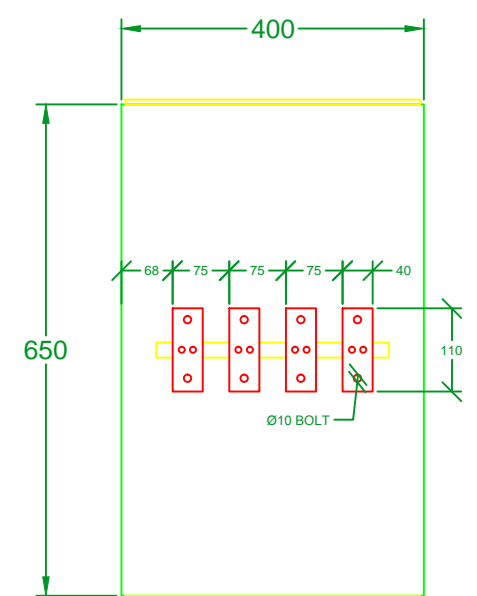

FRONT VIEW (EOR ONLY)
(BEHIND DIN FUSE
DISCONNECTOR)
(TOBLNT.00/160EOR)

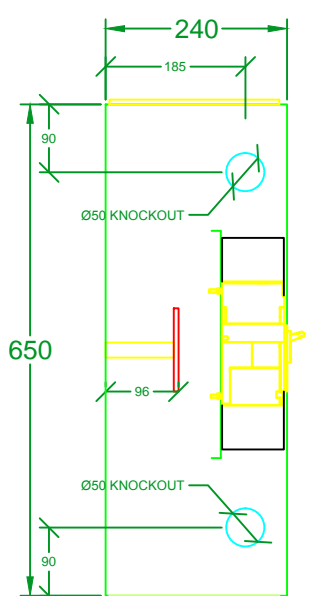

SIDE VIEW
(TOBLNT.00/160CB)

CONSTRUCTION SPECIFICATION

TEE-OFF BOX:
1.5MM, ZINC ANNEALED STEEL, POWDER COATED COLOUR:
ORANGE-X15 SMOOTH FINISH
LIFT-OFF COVERS
6mm SPLIT BAKELITE GLAND PLATES TOP & BOTTOM.

INTERCONNECTION CABLE:
NOT BY BOVARA

ELECTRICAL EQUIPMENT:
QTY 2, 250A 3 PHASE MOULDED-CASE CIRCUIT BREAKER, MOUNTED
ON A GALVABOND GEAR TRAY.


LABEL DETAILS:
NOT BY BOVARA

CONTRACTOR TO TAKE NOTE OF THE MIN & MAX DISTANCES WHEN
INSTALLING, AS PER THE NSW SERVICE AND INSTALLATION RULES
AND SUPPLY AUTHORITY REQUIREMENTS.

RISING MAIN CONNECTORS NOT SHOWN. RISING MAIN CONNECTORS
ARE SUPPLIED UNINSULATED. BOVARA RECOMMENDS INSULATING
RISING MAIN CONNECTERS AS PER AS3000.

WE HAVE ALLOWED FOR 1 x 240mm² RISING MAIN CABLE PER
PHASE WITH 1 x 50mm² TEE OFF CABLE PER PHASE.

TO AS3000, NSW SERVICE AND INSTALLATION RULES, AND AS3439.1

| | | | | |
|---|--|------------------------------|-----------------------------|-------------------|
| PROJECT - TEE-OFF BOX WITH 2 X 250A MOULDED-CASE CIRCUIT BREAKERS | CUSTOMER | DRAWN by - BOVARA PTY LTD | YOUR REF: | IP Rating : IP 30 |
| | | | COLOUR : X15 ORANGE | FORM : FORM 1 |
| DRAWING No. - TOBL-O/CB | DATE - 11/06/2014 | CHECKED by | MATERIAL : 1.5mm MILD STEEL | MAX WIDTH: 400mm |
| | | | SCALE : 1:10 @ A3 | MAX HEIGHT: 650mm |
|  | 102 WETHERILL ST NORTH SILVERWATER, NSW 2128 PH: 1300 268 272 Fax: 1300 272 862 Email: sales@bovara.com.au | | | MAX DEPTH: 250mm |
| | | | | |